



SECTION A-A


(TYPICAL 2-LANE WITH SHOULDERS)

* The 4.5 m (15') dimension should be adjusted to 3.6 m (12') min. to 5.5 m (18') max. when placed adjacent to existing pcc pavement structure so that the joints are in prolongation.

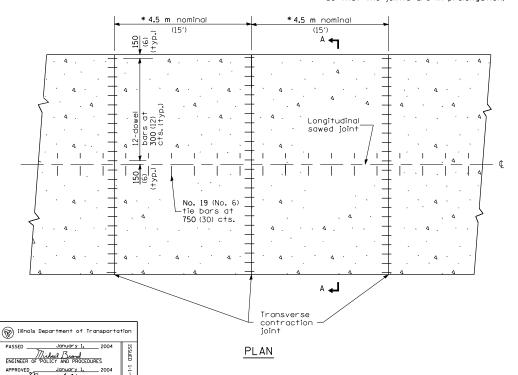



TRANSVERSE CONSTRUCTION JOINT

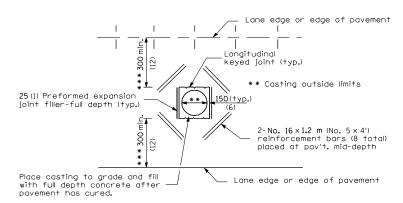

*** When the 300 (12) minimum cannot be achieved, the transverse joints shall be extended to either the longitudinal joint or edge of pavement.

DETAIL OF ADDED REINFORCEMENT FOR PAVEMENT BLOCKS-OUTS

GENERAL NOTES

See Standard 420001 for details of joints as shown.

All dimensions are in millimeters (inches) unless otherwise shown.

	DATE	REVISIONS	7.2 m (24') JOINTED PCC PAVEMENT
	1-1-04	Minor corrections of	
		joint information.	
	1-1-98	Del. Hinge Joints.	STANDARD 420101-02